


# MONUMENT RECORD

Corner ID: RICH E-05

Section Corner

Sections 5, 6, 7, 8, Township 9 North, Range 2 West, 2nd P.M.  
Richland Township, Monroe County, Indiana




**MONUMENT:** Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

A 10 inch x 10 inch limestone post was found.


**GEODETIC COORDINATES:** Northing: 1453762.58 Easting: 3070290.62

**MONUMENT LOCATION SKETCH:** Attach a sketch and aerial image

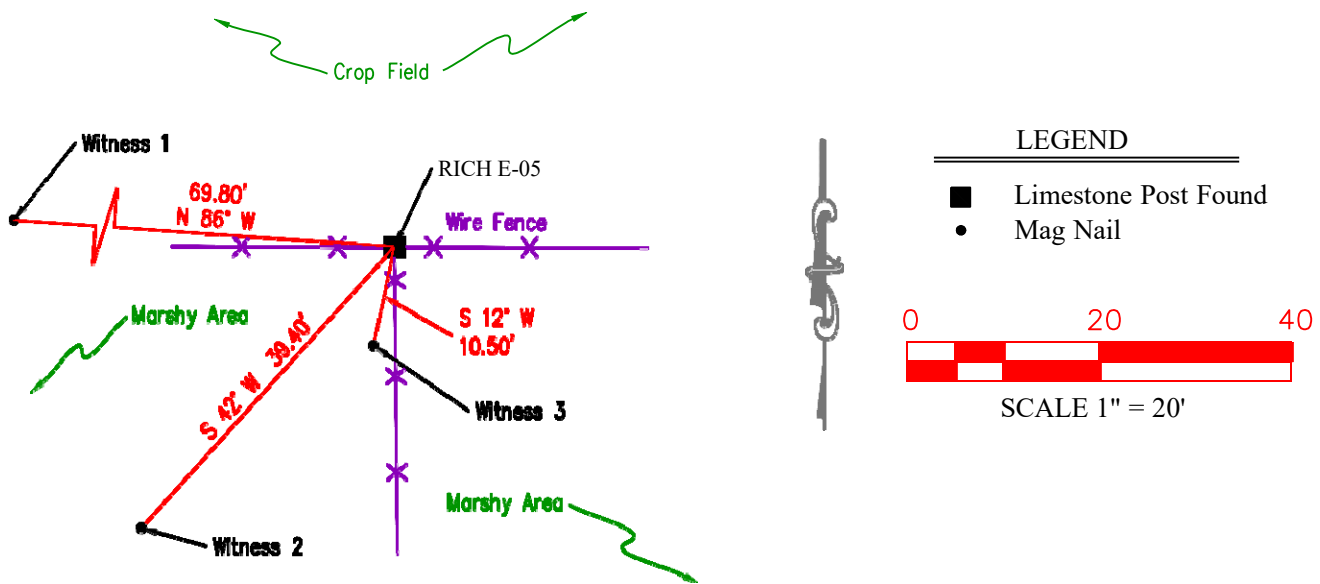

**WITNESS MONUMENT TIES:** Describe at least three new BT's and/or witness objects established or work done to preserve existing evidence. The following procedures are provided for guidance. Please utilize professional judgment when choosing witness ties. All ties to BT's should be a magnetic nail and washer (state what kind) set in a hack mark at root crown (less than 12" above ground) perpendicular to center of tree unless otherwise noted. All monuments should be tied to at least three accessories with a minimum of 60° of separation. BTs should be healthy with a minimum DBH of 4". BT description should include tree species, diameter at 4.5' above ground, distance of nail above ground, and description of nail location (e.g., SE side of root). Note bearing from monument to the center of the BT, distance to the nail. Other survey monuments that were located in the vicinity and their relation to the monument may also be included.

I.D.	Bearing	Distance	Witness Description
1	N 86° w	69.80'	Mag nail with washer set 10" above grade in south side of 10" diameter wood post
2	s 42° w	39.40'	Mag nail with washer set 14" above grade in north side of 8" diameter Ash tree
3	s 12° w	10.50'	Mag nail found 2' above grade in west side of 8" x 8" wood post



## MONUMENT RECORD


Corner ID: RICH E-05

Section Corner

Sections 5, 6, 7, 8, Township 9 North, Range 2 West, 2nd P.M.  
Richland Township, Monroe County, Indiana

**MONUMENT PRESERVATION:** *Describe work done to preserve existing monument. Stone mounds should be placed around monuments when stones are readily available. Paint corner stones but not the scribing. A Monroe County "PROTECT NEARBY SURVEY MARKER" sign shall be attached to a steel post when practicable. Note location and relation of corner to sign.*

A "Survey Marker" sign was placed on the north side of witness 3 above.



**OTHER EVIDENCE:** *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

This limestone post is situated at the intersection of an east-west and south running fence (from the corner).

### EXISTING SURVEY HISTORY

*Include as much detail and history of the corner as known at the time of perpetuation.*

### ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 1815 By: William Harris  
Where filed or Recorded:  
[https://ia801405.us.archive.org/23/items/in-plss-federal-notes/F\\_PM02T09NR02W\\_Notes.pdf](https://ia801405.us.archive.org/23/items/in-plss-federal-notes/F_PM02T09NR02W_Notes.pdf)  
Original Monument: Post

Bearing Tree or Witness Ties	Bearing	Distance
9" Dia. Beech	N 75° E	11 links
9" Dia. Beech	S 62° W	15 links

\*NA- No information referenced or information not legible

No original witness was recovered.

### SUBSEQUENT LEGAL SURVEY:

Year Surveyed: 1855 By: James Woodburn  
Referenced Monument: Stone (assumed)  
Where filed or Recorded: Legal Survey Book 1, pages 289-290

Bearing Tree or Witness Ties	Bearing	Distance
White Oak	S 6° W	47 links
10" Dia. Beech	S 78° E	35 links

\*NA- No information referenced or information not legible

No witness was recovered.

**OTHER SURVEY HISTORY:** *Include details such as surveyor name, date, recording info, monument description, etc.*

Date	Surveyor	Monument Description
1251855	James Woodburn	Stone (assumed)
832017	Douglas R. Curry	Limestone Post
362018	Charles D. Graham	Stone Post

### PREVIOUS CERTIFICATION

*Is this monument perpetuated by the Monroe County Surveyor's Office? If not, what is the cause of discrepancy?*

None

**THEORY OF LOCATION:** *Describe the theory of location for acceptance of this monument with reference to the recording information for the survey upon which this record is derived. Said recorded survey shall be certified by the same professional surveyor who certifies this document, shall identify and accept this monument, and shall have been recorded within (3) years of Form submittal.*

This limestone post is situated at the intersection of an east-west and south running fence (from the corner). James Woodburn states that he made a corner at this location (assumed to be a stone) in 1855. The area directly surrounding this corner holds water and a crop field is located to north, so it is likely if a stone marked this corner at one time, it no longer remains. Douglas Curry held the limestone post for this corner, Charles Graham later held this corner in a 2018 survey. It is common for this area for limestone posts to be located at or very near to Section corner and it fit well with lines of occupation.




## MONUMENT RECORD

Corner ID: RICH E-05

Section Corner

Sections 5, 6, 7, 8, Township 9 North, Range 2 West, 2nd P.M.  
Richland Township, Monroe County, Indiana



**PHOTO IDENTIFIED:** *Photograph close up photo of monument and a vicinity photo of the monument that includes the Monroe County "PROTECT NEARBY SURVEY MARKER" sign. Provide photo orientation and date. Additional photos may be included by clicking the "+" button at the end of the horizontal line.*

Photo Date: 3/28/2023



Looking at RICH E-05



Looking south at RICH E-05

### FIELD PERSONNEL:

Field Date: 3/28/2023

By: JR & TT

Project #: 21-157

Notes: Field notes on file at M.C.S.O.

**BASIS OF GEODETIC COORDINATES:** *Describe equipment, date, and personnel used to collect coordinates, datum, epoch, geoid and zone.*

Coordinates shown hereon were obtained from GPS observations utilizing the Indiana Real-Time Network (INCORS). Indiana West Zone, NAD83, State Plane Grid Coordinates, US Survey Feet. Geoid model ContinentalUS\_NGS2018.


Coordinate data was collected using a Carlson BRX7 GPS and an F-C 5000 Data Collector. Coordinate positions are grid north (Indiana State Plane West Zone).

# MONUMENT RECORD

Corner ID: RICH E-05

Section Corner

Sections 5, 6, 7, 8, Township 9 North, Range 2 West, 2nd P.M.  
Richland Township, Monroe County, Indiana



## UNCERTAINTIES IN THE CORNER LOCATION DUE TO:

- Variances in the Monuments: None
- Discrepancies in the Documents: None
- Inconsistencies in the lines of Occupation: None
- Theoretical Uncertainty (Random Errors in Measurement): The relative positional accuracy of this survey is within that allowable for a Rural class survey (0.26' plus 200 PPM) as defined I.A.C. Title 865

## CERTIFICATION:

Professional Surveyor Name: Eric L. Deckard  
Indiana Professional Surveyor No. LS 29900012  
Firm Name: Deckard Land Surveying, LLC

Date: 4/17/2023

Signature:

Seal:



## OFFICE USE ONLY COUNTY SURVEYOR APPROVAL:

Yes, ☒

Signature:

Date: 6/20/2023

Seal:

No,

Reasons for Denial:



## SURVEYOR REVIEW BOARD APPROVAL:

Yes, ☒

Signature:

Date: 6/20/2023

Seal:

No,

Reasons for Denial:

